



SUPERIOR[®]

AMERICA'S MOST COMPLETE LOCKER LINE[®]

www.ListIndustries.com


Proudly Made
in America
Since 1936





Specify **SAFEMESH84™** for the industry's safest high ventilation athletic lockers.

SUPERIOR FULLY-FRAMED ALL-WELDED LOCKERS FEATURE SAFEMESH84, THE INDUSTRY'S STRONGEST AND SAFEST EXPANDED METAL



SUPERIOR®

1/2" 13 Gauge, Flattened, Expanded Metal



COMMON

3/4" 13 Gauge, Flattened, Expanded Metal

RIGIDITY:

84% more steel ensures a more rigid unit

STRENGTH:

84% more steel than 3/4" style

SAFETY:

Smaller 1/2" diamond design keeps fingers out

SECURITY:

Reduces risk of loss, theft and content damage



ALL SUPERIOR METAL, PLASTIC AND RECRUITER WOOD LOCKERS ARE GREENGUARD CHILDREN AND SCHOOLS CERTIFIED

Greenguard is an indoor air quality certification program for low emitting products and materials that evaluates over 75,000 chemicals, including volatile organic compounds, carcinogens and reproductive toxins. Referenced in both the Collaborative for High Performance Schools (CHPS) and the Leadership for Energy and Environment Design (LEED) Building Rating System, Greenguard Children & Schools Certification establishes strict chemical emission standards for products intended for use in environments where children and others work, play or reside.



GALVANITE™ Corrosion Resistant Sheet Steel prevents rust and corrosion

IDEAL FOR USE IN HIGH HUMIDITY AREAS, OUTDOOR LOCATIONS, NEAR SHOWER, POOL AREAS AND FOOD INDUSTRY FACILITIES

GALVANITE™, is List Industries' trade marked name for lockers and cabinets manufactured with galvanneal sheet steel components and finished with an electrostatically applied high-grade powder coat finish. Galvanite and powder coat

offer exceptional double protection against corrosion, even under the most adverse conditions. Tests indicate that galvanneal increases the estimated lifecycle threefold.

WHAT IS GALVANNEAL?

Galvanneal is the result of the combined processes of galvanizing (hot-dipped zinc coating) and annealing (heat treatment). Galvanneal does not flake off its galvanized coating when formed, stamped, and bent.

The very fine matte finish acts like a primer that easily adheres to paint. These characteristics make galvannealed sheet steel ideal for steel lockers in high humidity, corrosion prone areas.

GALVANITE™ COLD ROLLED SHEET STEEL

with our powder coat finish after a 336 hour salt spray test.



COMMON COLD ROLLED SHEET STEEL

with a 1 mil dry film build paint thickness after a 336 hour salt spray test.





ALL-STAR® fully-framed all-welded OPEN FRONT SPORT LOCKER



THE INDUSTRY'S SUPERIOR LOCKER!

Superior All-Star lockers are the industry's most demanded sport lockers by high school, collegiate and professional athletic programs. Since the introduction of our All-Star locker back in 1984, we have custom designed hundreds of variations for programs throughout the country.

All-Star lockers feature our exclusive Hollow-T framing system, expanded metal sides for maximum ventilation and interlocking body components creating a functional yet durable sports locker guaranteed in writing to last a lifetime.

The versatility of our Hollow-T framing system allows you to customize a locker to meet your specific needs. **Feel free to contact our inside sales department at 1-800-776-1342 to discuss how we can best meet your locker room needs.**



Shown with optional 12" wide security box (upper side is solid) and foot locker/seat



Shown with optional full width security compartment and lower seat/shelf



Shown with optional wallet security box (7-1/4" wide x 9" deep x 7-1/4" High) and lower seat/shelf



Base model includes upper hat shelf, stainless steel coat rod and two single hooks

Locker Sizes

All-Star Sport Lockers	
WIDTHS	12", 15", 18", 24", 30", 33", 36"
DEPTHS	12", 16", 18", 22"
NOMINAL COLUMN HEIGHTS	60", 72", 84"
Actual locker column height is 2-3/4" over nominal column heights shown for 60" and 72" models. 84" high models will be 84" actual. All-Star lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.	



Underside of optional foot locker seat is reinforced to support today's athlete



Stainless steel coat rod for added convenience.



fully-framed all-welded ATHLETIC TEAM LOCKERS ARE BUILT TO LAST



THE VARSITY

Designed with the athlete in mind, single tier lockers are highly recommended for varsity team rooms. These lockers are also excellent in combination with P.E. Lockers (Page 6). Varsity Lockers are engineered to withstand excessive abuse.



THE JR. VARSITY

Jr. Varsity double tier lockers are ideal when budget or space limitations apply. Double tier lockers can be used in team rooms as well as in P.E. rooms in combination with P.E. Lockers (page 6).



THE INTRAMURAL

Intramural triple tier athletic locker are ideal when space and/or funds are limited. The opening height allows clothing to hang on hooks allowing better ventilation than a smaller P.E. Locker. Intramural Lockers are also ideal for use in combination with P.E. Lockers (page 6).



STANDARD

Deep drawn stainless steel recessed handle with gravity lift-type latching



STANDARD

Our heavy-duty 13 gauge 7-knuckle 3-1/2" hinge vs. common 2" K.D. locker style hinge



OPTIONAL

3-point projecting turn-handle latching is available for Varsity, Jr.Varsity and Intramural Team Lockers. Contact factory for turn-handle specifications. Not available on 9" wide lockers.



UPGRADE TO THE PREMIER SERIES OF TEAM LOCKERS

which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Premier Series Team Locker doors as well as for the 12" wide Premier Series turn-handle doors.

Features

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvaneal bottom

DOORS: 14 gauge diamond perforated doors are standard. Plain, louvered and Security-Plus door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle. Optional projecting 3-point turn-handle is available.

LATCHING: 11 gauge latch hooks with riveted on bumper MIG welded to Hollow-T frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges:

- 3-hinges per opening 48" high and higher
- 2-hinges per opening 20" high thru 36" high

SHELVES: 16 gauge galvaneal hat shelf for Varsity openings 60" and 72" high, 16 gauge galvaneal intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See chart for standard sizes

All-Welded Wardrobe Locker Sizes

Single Tier	
WIDTHS	9", 12", 15", 18", 24"
DEPTHS	12", 16", 18", 22"
NOMINAL COLUMN HEIGHTS	48", 60" 64", 72"
Double Tier	
WIDTHS	9", 12", 15", 18", 24"
DEPTHS	12", 16", 18", 22"
OPENING HEIGHTS	24", 30", 32", 36"
NOMINAL COLUMN HEIGHTS	48", 60", 64", 72"
Triple Tier	
WIDTHS	9", 12", 15", 18", 24"
DEPTHS	12", 16", 18", 22"
OPENING HEIGHTS	20", 24"
NOMINAL COLUMN HEIGHTS	60", 72"

Actual locker column height is 2-3/4" over nominal column heights shown for 60" and 72" models. 84" high models will be 84" actual. Welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.



fully-framed all-welded ATHLETIC P.E. LOCKERS

Superior® P.E. lockers are the perfect solution when locker room space is at a premium.

Heavy gauge fully-framed all-welded construction combined with modern features and the design flexibility of our Hollow-T framing system allows you to customize a locker room environment which is user friendly and maximizes space. Innovative solutions like our Gym Class 9E locker configurations are the result of listening to the needs of coaches and P.E. instructors for more than 60 years.



Side hinged doors are standard for 15" and 18" high, optional for doors 12" high and under (see notes)



Top hinged doors are standard for doors 12" high and under and include spring bolt latching



Deep drawn stainless steel recessed handle with single-point latching is optional on side hinged gym doors

MAXIMIZE YOUR SPACE GYM CLASS 9E (6:1 RATIO)

This unit is a favorite among architects, coaches and physical education instructors across the country. Superior Gym Class 9E lockers accommodate 12 students in a compact three lineal feet of space utilizing the popular 6:1 ratio replacing the typical "626" combination. The benefit is that each gym locker where physical education clothing is stored is a full 18" wide x 8" high. Each wardrobe locker where height is needed for hanging school clothing is 9" wide x 48" high. **Standard Gym Class 9E unit size is 36 - 3/8" wide x (12", 16", 18", 22") deep x 74-3/4" high actual**



GYM CLASS LOCKER UNITS



TYPICAL UNITS



All gym doors shown with optional padlock strike plates which protect finish from being marred by padlock

- Maximizes ventilation for clothing and shoes
- Increases shelf space by 50%
- Adds 12" in height to wardrobe opening
- One gym locker at unit bottom in lieu of two
- 3 latch points and 3 hinges per wardrobe door instead of 2

Features

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvalneal bottom

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Security-Plus and plain door styles are available. Doors 12" high and under are standard with top hinge. Doors 15" and 18" high are standard with side hinge.

HANDLE/LATCHING: Top hinge doors have a projecting spring loaded heavy-duty latch/handle with integral padlock lug. Side hinge doors have a single-point thru-the-door projecting finger pull handle with padlock hasp. Optional deep-drawn seamless stainless steel recessed handle is available in side hinged gym doors only and will utilize our Marquis style thru-the-handle single-point no moving parts latching and include two 13 gauge 7-knuckle 3-1/2" hinges

HINGES: Top hinge doors use a concealed 3/16" continuous rod. Side hinge doors use two heavy-duty 13 gauge 7-knuckle 3-1/2" hinges. Optional side hinged doors 8" and 9" high will have special hinges

HOOKS: None

SHELVES: 16 gauge galvalneal intermediate shelves

WARRANTY: Lifetime

SIZES: See chart for standard sizes

All-Welded Box Locker Sizes

Standard P.E. Locker Sizes		
Widths for all gym locker openings 12", 15", 18"		
Depths for all gym locker openings 12", 16", 18", 22"		
Tier	Opening Hieghts	Nominal Column Heights
Four Tier	8", 9", 12", 15", 18"	32", 36", 48", 60", 72"
Five Tier	12", (4) 15" & (1) 12"	60", 72"
Six Tier	8", 10", 12"	48", 60", 72"
Seven Tier	(6) 10" & (1) 12"	72"
Eight Tier	8", 9"	64", 72"
Nine Tier	8"	72"
<p>Actual column height is 2-3/4" over nominal height. Please note that the actual units supplied will be fabricated to meet layout and job conditions in standard width units up to 60" wide</p>		





TA-50 fully-framed all-welded EQUIPMENT MANAGER™ LOCKERS

The Equipment Manager is a fully-framed, all-welded locker that is the secure answer to your storage needs. Ideal for military gear storage.



3-point turn-handle latching

Features

BODY CONSTRUCTION: Fully-framed all-welded construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 16 gauge top and 18 gauge solid back, 16 gauge galvaneal bottom. Optional solid sides are available.

DOORS: 14 gauge diamond perforated doors with 18 gauge full-height door stiffener for both doors is standard. Louvered, Security-Plus and plain door styles are available

HANDLE: 3-point turn-handle latching shelves: 16 gauge galvaneal upper shelf located 12" down from top, 16 gauge galvaneal lower shelf located 18" up from bottom and 16 gauge galvaneal bottom shelf

HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges sizes: See below for locker sizes

ACCESSORIES: Stainless steel coat rod located under upper shelf

WARRANTY: Lifetime

Locker Sizes

Standard P.E. Locker Sizes

WIDTHS	24", 30", 36", 42", 48"
DEPTHS	12", 16", 18", 22", 24"
HEIGHTS	60", 72", 84"

Actual locker column height is 2-3/4" over nominal column heights shown for 60" and 72" models. 84" high model will be 84" actual. Equipment Manager lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.

MARQUIS® CHAMPION fully-framed all-welded ATHLETIC LOCKERS

This is the most rugged and demanded athletic locker available today!



Deep drawn stainless steel recessed handle with single-point latching

Marquis Champion Lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Marquis doors.

Features

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvaneal bottom

DOORS: 14 gauge diamond perforated doors with a full height 3" wide 18 gauge door stiffener are standard. Plain, louvered and Security-Plus door styles are available. All doors are side hinged

HANDLE: Deep-drawn single-point seamless stainless steel recessed handle

LATCHING: Single-point maintenance-free quiet latching with 11 gauge MIG welded latch

HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges:

- 3-hinges per opening 48" high and higher
- 2-hinges per opening 36" high and under

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

SHELVES: 16 gauge galvaneal hat shelf for single tier openings 60" and 72" high, 16 gauge galvaneal intermediate shelves

WARRANTY: Lifetime

SIZES: See page 5 and 6 for standard sizes



GRADUATE[™] fully-framed all-welded CORRIDOR LOCKERS



Deep drawn stainless steel recessed handle with gravity lift-type latching



UPGRADE TO PREMIER SERIES GRADUATE LOCKERS which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Premier Series doors.

Features

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 18 gauge fully-framed solid sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvaneal bottom

DOORS: 14 gauge louvered doors are standard (Premier series adds a 3" wide 18 gauge door stiffener). Plain, Security-Plus, Safety-View and diamond perforated door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

LATCHING: 11 gauge latch hooks with riveted on bumper MIG welded to Hollow-T frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges:

- 3-hinges per opening 48" high and higher
- 2-hinges per opening 20" high thru 36" high

SHELVES: 16 gauge galvaneal hat shelf for single tier openings 60" and 72" high, galvaneal intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See page 5 for standard sizes

MARQUIS[®] PROTECTOR fully-framed all-welded CORRIDOR LOCKERS

THE INDUSTRY'S TOUGHEST CORRIDOR LOCKER



Deep drawn stainless steel recessed handle with single-point latching



MARQUIS PROTECTOR LOCKERS include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Marquis doors.

Features

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 18 gauge fully-framed solid sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvaneal bottom

DOORS: 14 gauge plain doors with a full height 3" wide 18 gauge door stiffener are standard. Louvered, Security-Plus and diamond perforated door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

LATCHING: Single-point maintenance-free quiet latching with 11 gauge MIG welded latch

HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges:


- 3-hinges per opening 48" high and higher
- 2-hinges per opening 20" high thru 36" high

SHELVES: 16 gauge galvaneal hat shelf for single tier openings 60" and 72" high, 16 gauge galvaneal intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See page 5 for standard sizes



CLASSMATE™ unibody all-welded CORRIDOR LOCKERS



16 gauge continuous piano hinge



Deep drawn stainless steel recessed handle with gravity lift-type latching



Features

BODY CONSTRUCTION: All-welded unibody construction, 16 gauge solid sides integral with frame, 16 gauge continuous top, 18 gauge solid back, 16 gauge bottom

DOORS: 14 gauge louvered doors are standard. Plain, Security-Plus, Safety-View and diamond perforated door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

WARRANTY: Lifetime

SIZES: See page 5 and 6 for standard sizes. Actual unibody locker height is the nominal height

UPGRADE TO PREMIER SERIES CLASSMATE® LOCKERS which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Premier doors.

MARQUIS® BOOKSAFE® III unibody all-welded CORRIDOR LOCKERS



MARQUIS BOOKSAFE III LOCKERS

include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Marquis doors.



Deep drawn stainless steel recessed handle with single-point latching

Features

BODY CONSTRUCTION: All-welded unibody construction, 16 gauge solid sides integral with frame, 16 gauge continuous top, 18 gauge solid back, 16 gauge bottom

DOORS: 14 gauge plain doors with a 3" wide 18 gauge full height door stiffener are standard. Louvered, Security-Plus and diamond perforated door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle with single-point latching

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet latching with 11 gauge MIG welded latch

HINGES: 16 gauge continuous piano hinge is standard. Heavy-duty 13 gauge 3-1/2" 7 knuckle hinges are available as an upgrade

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

WARRANTY: Lifetime

SIZES: See page 5 for standard sizes. Actual unibody locker height is the nominal height

Features

BODY CONSTRUCTION: Unibody all-welded, 16 gauge solid sides, galvanneal corrosion resistant sheet steel. Back is 18 gauge

BODY STYLES: Single tier, designed for specialized use

FEATURES: Security box (9" x 12") with keyed lock

DOOR: 14 gauge louvered double doors with full-height welded-in stiffener. Security box door is not vented.

HINGES: 16 gauge continuous piano type

HANDLE: 3-point high-security turn handle latching handle

HOOKS: Two single wall hooks in wardrobe area plus single hook in opening below security box

COAT RODS: One at vertical wardrobe section

SHELVES: 16 gauge, two full-width at top, one partial shelf above security box

Standard Upper Unit Sizes

WIDTHS	24", 30", 36", 48"
DEPTHS	18", 24"
HEIGHTS	72"

Standard Lower Base Sizes

WIDTHS	24", 30", 36"
DEPTHS	30", 36"
HEIGHTS	18"

TASK FORCE EXP

EMERGENCY RESPONSE unibody all-welded PERFORMANCE LOCKERS



- UTILITY BELT HOOK
- LOCKING SECURITY BOX
- ONE SIDE POCKET, to accommodate a 1" thick clipboard
- FULL HEIGHT PIANO HINGE
- FULL HEIGHT DOOR STIFFENER
- OPTIONAL LOWER STORAGE AREA with pull-out drawer doubles as a seat with top

Available with and without base storage compartment and seat



CUBBIE unibody all-welded SCHOOL CUBBIE LOCKERS

PRIMARY CUBBIE

PRIMARY II CUBBIE

BACKPACK CUBBIE



PRIMARY JR. CUBBIE



Features

BODY CONSTRUCTION: Unibody all-welded 16 gauge steel construction, backs are 18 gauge, bottom is galvanneal sheet steel for maximum corrosion resistance, hemmed and beaded dividers are safe to the touch

BODY STYLES: Open design, 4 body styles

SHELVES: 16 gauge welded to body for added rigidity with a beaded leading edge for added safety

NOTES: Easily secures to wall and floor for added safety, low installation costs, reduced installation time, low maintenance, low life-cycle cost, lifetime warranty, insect and termite proof. All welded cubbies will ship in multiple column units up to 60" wide to meet individual jobsite conditions.

MODEL SIZES	WIDTH	DEPTH	HEIGHT
PRIMARY CUBBIE	12", 15"	12", 16"	48"
PRIMARY II CUBBIE	12", 15"	12", 16"	48"
PRIMARY JR. CUBBIE	12", 15"	12", 16"	24"
BACKPACK CUBBIE	15", 18"	12", 16"	48"



UNIFORM

Exchange Lockers™

Full Height HANGING UNIFORM LOCKER

Model HUE214-1
(32-9/16" w X 21" d X 84" h)

Half Height HANGING UNIFORM LOCKER

Model HUE214-2
(32-9/16" w X 21" d X 84" h)

8 Person Uniform EXCHANGE LOCKER

Model HUE214-8P
(32-9/16" w X 21" d X 84" h)



Soiled Uniform EXCHANGE LOCKER

Model HUE614-1
(26" w X 21" d X 84" h)

9 Person Uniform EXCHANGE LOCKER

Model HUE454-9P
(24" w X 15" d X 84" h)



HEAVY-DUTY PADLOCK HANDLES
(locks not included)



User doors re-inforced at latches

Features

BODY CONSTRUCTION: 24 gauge, backs perforated for ventilation, galvanized bottoms

BODY STYLES: Full and half height hanging uniform lockers, 9 person folded uniform exchange lockers, 8 person hanging uniform exchange locker, soiled uniform locker

DOOR: User doors are 20 gauge (louvered at 8 and 9 Person)

HINGES: 5 knuckle (master door)

FRAME: Master door frame is 16 gauge

LATCHING: Master Door: Multi-point with industry standard key lock User Doors: Single-point turn latch for padlocks (locks not included)

COAT RODS: Standard for full and half height hanging uniform lockers and 8-Person exchange lockers

NOTES: All uniform exchange lockers ship fully-assembled

www.ListIndustries.com



CLASSIC KD WARDROBE LOCKERS (DOORS 20" HIGH AND HIGHER)



Deep drawn stainless steel recessed handle with gravity lift-type latching

MAXoption

UPGRADES all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks.

WARDROBE LOCKER SIZES

STANDARD LOCKER SIZES	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
SINGLE TIER	9" 12" 15" 18" 24"	12" 15" 18" 21" 24"	36" 48" 60" 72"	36" 48" 60" 72"
DOUBLE TIER	9" 12" 15" 18"	12" 15" 18" 21" 24"	30" 36"	60" 72"
TRIPLE TIER	9" 12" 15"	12" 15" 18"	20" 24"	60" 72"

Features

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide are standard. Security-Plus, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-

point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1- single hook for 9" wide openings 30" and higher


SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See chart below for sizes

CLASSIC KD BOX LOCKERS (DOORS 18" HIGH AND HIGHER)



Box door single point thru-the-door finger pull padlock hasp

Optional padlock strike plates for box doors protect finish from being marred by padlock

MAXoption

UPGRADES all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks.

BOX LOCKER SIZES

STANDARD LOCKER SIZES	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
FOUR TIER	12", 15"	12", 15", 18"	15", 18"	60", 72"
FIVE TIER	12", 15"	12", 15", 18"	12", 14.4"	60" 72"
SIX TIER	12", 15"	12", 15", 18"	12"	72"

Features

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 18 gauge louvered doors are standard. Plain, Security-Plus, Safety-View Plus and diamond perforated door styles are available

FRAME: 16 gauge frame

HANDLE: Projecting finger pull

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point thru-the-door finger pull padlock hasp

HINGES: 16 gauge continuous piano hinge

NOTES: All production KD lockers are supplied without legs unless otherwise specified. Safety-View Plus polycarbonate doors are available for 12" wide x 12" high five and six tier box doors only

HOOKS: None

WARRANTY: 2 years

SIZES: See chart below for sizes



CLASSIC KD SPECIALTY LOCKERS



DUPLEX

TWO-PERSON

NOTE:

- Plain, Security-Plus and diamond perforated doors are available for all specialty lockers.
- Safety-View Plus polycarbonate doors are available for Sixteen Person and 4 wide wall mount.

DUPLEX

Duplex lockers are the most economical full length locker available. This locker conserves valuable floor space, yet provides ample height for hanging full length garments. Duplex lockers provide two completely private lockers in each frame. One hat shelf and two single hooks are standard in each wardrobe opening. Coat rod is optional for 18" and deeper.

TWO-PERSON

Two-Person lockers provide ample storage space for two users in a 15" wide space. Upper box doors are controlled by command latches located in the corresponding lower compartment. Two single hooks per wardrobe opening is standard. Coat rod is optional for 18" and deeper.



Deep drawn stainless steel recessed handle with gravity lift-type latching is standard for Duplex and Two-Person wardrobe doors



4-WIDE WALL MOUNT

Wall mount Lockers provide ample additional storage space. 48" undermount coat rod is optional.

SIXTEEN PERSON

Sixteen Person lockers are the economical solution for personal security along with hanging space for full length garments. Ideal for student & teacher lounges, offices, commercial and retail establishments. 48" coat rod and 6" legs are standard

STANDARD LOCKER SIZES		WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
SPECIALTY LOCKERS	TWO PERSON	15" 18"	12", 15", 18", 21"	N/A	60", 72"
	DUPLEX	15"	12", 15", 18", 21"	60", 72"	60" 72"
	*SIXTEEN PERSON	72"	18"	12"	78" (with 6" legs)
	4-WIDE WALL MOUNT	48"	18"	12"	14-3/4"

STANDARD QUIET & WHISPER QUIET KD WARDROBE LOCKERS



STANDARD QUIET ECONOMY MODEL

STANDARD QUIET ECONOMY MODEL

Standard Quiet lockers are constructed exactly like our Classic K.D. lockers except the door is furnished without louvers eliminating air rush through the door and providing quiet operation.

SOUND DEADENING PANEL IS STANDARD ON WHISPER LOCKERS

MAXoption

UPGRADES all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks.



WHISPER QUIET PREMIUM MODEL

Features

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge plain doors (18 gauge for 9" wide), Sound deadening panel and vinyl coated latching for Whisper quiet lockers only

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep drawn stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See wardrobe locker chart on page 12 for sizes



Deep drawn stainless steel recessed handle with gravity lift-type latching



Ventilated top and bottom door flanges are included on all Standard Quiet and Whisper Quiet Lockers



HEAVY-DUTY CORRIDOR (HDC) KD WARDROBE LOCKERS



MAXoption

UPGRADES all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks.



Deep drawn stainless steel recessed handle with gravity lift-type latching



Features

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 14 gauge louvered doors are standard. Plain, Security-Plus, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher

- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See wardrobe locker chart on page 12 for sizes

UPGRADE TO PREMIER SERIES HDC Corridor lockers which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Premier doors.

MARQUIS® STUDENT KD BOX LOCKERS

AMERICA'S FIRST
MAINTENANCE-FREE
SINGLE-POINT LOCKER
FEATURES NO MOVING
PARTS.

OVER 25 YEARS OF
EXPERIENCE SETS
MARQUIS STUDENT
LOCKERS ABOVE THE
REST.



MAXoption

UPGRADES all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks.



Features

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 14 gauge plain doors with 18 gauge full-height door stiffener are standard. Louvered, Security-Plus and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet, 11 gauge latch hooks MIG welded to frame

HINGES: 16 gauge continuous piano hinge is standard. Heavy-duty 13 gauge 3-1/2" 7-kuckle hinges are available as an upgrade

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See wardrobe locker chart on page 12 for sizes


MARQUIS STUDENT LOCKERS include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Marquis doors.



Deep drawn stainless steel recessed handle with single-point latching



HEAVY-DUTY VENTILATED (HDV) KD WARDROBE & BOX LOCKERS

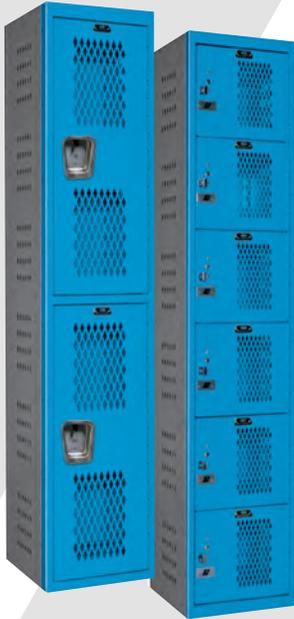

UPGRADES:

Upgrade to our Premier Series HDV lockers which include a full height door stiffener welded to the inner door face.

Upgrade to our **Marquis Student HDV** lockers which include our single-point latching and a full height door stiffener welded to the door inner face.



Deep drawn stainless steel recessed handle with gravity lift-type latching is standard for HDV wardrobe doors 20" high and higher

Features

BODY CONSTRUCTION (WARDROBE & BOX LOCKERS): Knock down (KD) with 16 gauge solid top, bottom and intermediate shelves, 16 gauge diamond perforated sides, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Security-Plus and Safety-View door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HINGES: 16 gauge continuous piano hinge

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

WARDROBE LOCKERS (Doors 20" and higher):

HANDLE: Deep-drawn seamless stainless steel recessed handle

LATCHING: Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher,
- 2 point latching for openings 20" high thru 36" high

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier and 1-double
- 1 - single hook for 9" wide openings 30" and higher

SHELVES: 16 gauge hat for single tier openings 60" and 72" high

BOX LOCKERS:

HANDLE: Single-point thru-the-door finger pull padlock hasp

HOOKS: None

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See charts on page 12 for sizes

DOOR VENTILATION OPTIONS

Please refer to individual product pages for applicable options.



Plain Doors
(Quiet)



Louvered Doors
(Classic)



Louvered Doors
(With Door Stiffener)



Diamond Perforated Doors
(High Ventilation)



Diamond Perforated Doors
(With Door Stiffener)



Security-Plus Doors
(Security Ventilation)



Safety-View Doors
(See-thru Polycarbonate Insert)



Safety-View Plus Box Doors
(See-thru Polycarbonate Door)
12" wide x 12" high KD Box Doors only



Hybrid Red Oak Plain Door



Hybrid Red Oak Panel Door

RECRUITER

SUPERIOR Custom Wood Sport Lockers

- All lockers ship fully-assembled
- Fabricated from furniture grade red oak
- Strong, durable and long-lasting
- Excellent moisture resistance
- Shoulder pad storage
- 3-coat lacquer finish
- Upper security box door includes built-in combination lock
- Optional team engraved logo on security box door
- Lower foot locker/seat allows for storage of bulk items
- Chrome plated coat rod

Features

BODY CONSTRUCTION: Wood lockers shall be fabricated from 3/4" plain sliced red oak plywood throughout including sides, backs and hat shelves.

BODY STYLES: Open-front with upper security box and footlocker

STOCK SIZES: 24" wide x 24" deep x 84" high
30" wide x 24" deep x 84" high

FINISH: All locker parts to be finished with a three coat catalyzed clear cabinet lacquer

TRIM: Face trim, shelf valances, seat front nosing, seat hinge support blocking and seat side support cleats are made from red oak lumber

SECURITY BOX DOOR: Made from red oak lumber

HINGES: Continuous in bright brass plating

HOOKS: Two double prong metal hooks

CLOTHES ROD: Made from KV 1-1/16" diameter chrome plated steel, 075" wall thickness

UPPER SHELF: Covered with Wilson-Art 7888-60 Golden Oak plastic laminate for durability

APPEARANCE: Color: Natural red oak

WARRANTY: 1 year



Non-stock sizes, optional wood species and specific configurations are also available. Please consult factory for details.

THE BEAUTY IS IN THE DETAILS...





Club Lockers



Shown with optional finished end panels, base and crown molding

Features

BODY CONSTRUCTION: Wood lockers shall be fabricated from 3/4" plain sliced red oak plywood throughout including sides, backs and hat shelves.

BODY STYLES: Single, double and triple tier

FINISH: All interior/front faces to be finished with a three coat catalyzed clear cabinet lacquer or equivalent.

DOOR: Furniture grade red oak plywood, finished with 3 coats of lacquer

LATCHING: Cylinder key locks are standard

HINGES: Concealed european-style cabinet hinges

HOOKS: Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT RODS: Standard for single and double tier

SHELVES: Hat shelf is included in single tier lockers.

LEGS: No legs

APPEARANCE: Natural red oak



Available optional decorative crown molding and base in red oak finish



Optional wood species and door styles are available. Doors can be prepared for key locks, electronic locks, and padlocks. Please consult factory for details.



Key locks are standard



Concealed european style cabinet door hinges

SUPERIOR®

AMERICA'S MOST COMPLETE LOCKER LINE

AQUAMAX HDPE solid plastic lockers

IDEAL FOR USE IN WET ENVIRONMENTS SUCH AS
SHOWER AREAS, POOL AREAS AND OUTDOORS.



Standard Sizes	
WIDTH	12" 15" 18"
DEPTH	12" 15" 18"
HEIGHT	60" 72"

Features

BODY CONSTRUCTION: High density (HDPE) Polyethylene plastic, 3/8" thick body panels

DOORS: 1/2" thick solid HDPE plain doors with perimeter ventilation

HANDLE (wardrobe): Projecting solid plastic lift handle

HANDLE (box): Box doors 18" and under include a single-point projecting padlock hasp with door pull

LATCHING: Full-height lift-type latching for single, double and triple tier wardrobe lockers

HINGES: Continuous aluminum hinge is powder coated

HOOKS: Two stainless steel single prong hooks in single and double tier

SHELVES: Upper hat shelf and lower shelf included in single tier lockers 60" and 72" high

NOTES: All doors prepared for use with padlock (locks not included). Production locker body components are available in white only.

WARRANTY: 20 years

SIZES: See chart

Available in single, double, triple, four, five, six and "Z" tier configurations..

304 STAINLESS STEEL

STAINLESS STEEL LOCKERS



PERFECT FOR
AREAS PRONE
TO RUST AND
SANITATION
CONCERNS
AND ARE IDEAL
FOR FOOD
INDUSTRY,
POOL AREA
AND OUTDOOR
APPLICATIONS.



Features

BODY CONSTRUCTION: Knock down (KD) with 24 gauge 304 stainless steel body components

DOORS: 16 gauge 304 stainless steel louvered doors are standard.

FRAME: 16 gauge 304 stainless steel frame with 16 gauge horizontal cross member between doors on double tier wardrobe lockers

HANDLE (wardrobe): Deep-drawn seamless 304 stainless steel recessed handle

HANDLE (box): Projecting finger-pull handle is standard

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING (wardrobe): 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher

- 2-point latching for openings 20" high thru 36" high

LATCHING (box): Single-point thru-door finger pull padlock hasp

HINGES: 2" long 16 gauge 5-knuckle stainless steel hinges. 3 hinges for doors 48" and higher and 2 for doors under 48" high.

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher. No hooks in openings less than 20" high.

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See wardrobe and box locker charts on page 12 for sizes

Now you can select from
24 Designer Powder Coat Colors

and choose Two-Tone Color combinations for your steel production lockers at no additional cost.



Choose doors of one color and frame of a second color to add more visual impact to any project design.

All surfaces shall be thoroughly cleaned with a seven stage hot-spray washing process and coated with an insoluble iron phosphate film.

A high grade custom blended powder is applied by a computer controlled, highly efficient electrostatic paint system. The product is cured for 20 minutes at 350 degrees through a continuous baking oven to provide maximum paint adhesion, tough durability and a high grade paint finish.

All body components of production KD lockers will be painted our standard neutral color, currently Parchment (choice of Parchment or Hallowell Gray for HDV body components only).



Metal Locker Color Selection

714 Snow White	708 Midnight Ebony	736 Sport Silver	711 Platinum	706 Heather	725 Hallowell Gray
738 Charcoal	729 Parchment	713 Sand Beige	710 Sandstone	723 Trophy	737 Forest Gold
728 Hoop	721 Relay Red	727 Maroon	720 Pep Rally	719 Jersey	731 Denim
717 Grand Slam	707 Marine Blue	722 Tidal Wave	705 Green Mist	735 Basil	704 Evergreen

Colors shown are an approximate representation of the actual color. Please do not make your final color selection from printed media or internet images, as they may not be 100% accurate.

For a more accurate color selection call

800-776-1342

or e-mail us at

info@ListIndustries.com

to request a full set of our master metal color samples.

List Industries Inc. reserves the right to modify its designs and/or make changes in specifications or colors without prior notice. In the interest of safety, all Superior lockers, cubbies and shelving must be securely anchored to the floor and/or wall.



401 Jim Moran Blvd., P.O. Box 9601 Deerfield Beach, FL 33442

www.ListIndustries.com

800-776-1342

(954) 429-9155 Fax (954) 428-3843

